


## FEATURES

- Credit card format
- Read/write capability
- Convenient to use
- Ideal for security applications
- Non-battery
- Extended read range over proximity cards
- 1024 bit read/write memory

## eGo™ ID Card

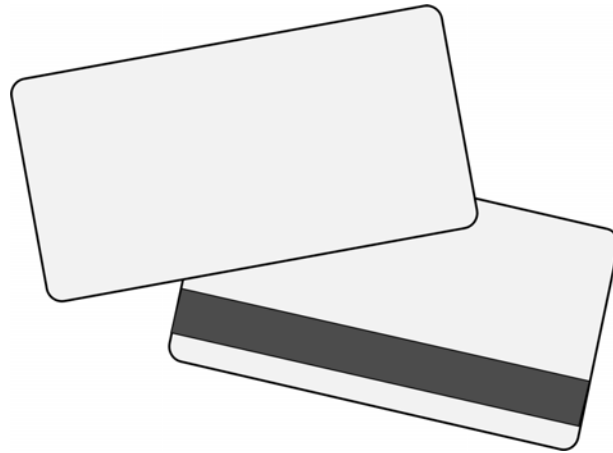

The eGo™ ID Card is a 915 MHz radio frequency (RF)-programmable, intelligent identification card. In a credit card format that is ISO 7810 compliant in thickness and form factor, this card provides long-range identification, write, and re-write capability. The eGo ID Card is ideal for a wide variety of applications from Homeland Security, corporate and personal security to luggage identification and customer loyalty programs.

Based on the ANS INCITS 256-2001 standard technology, the eGo ID Card offers an extended read range over proximity cards and 1024-bit read/write memory. The tag provides the capability to read, write, rewrite, or permanently lock individual bytes.

Its read/write capability enables the eGo ID Card to record entrances, exits, and movements of the cardholder and dynamically update cardholder profiles and data. Its extended read range allows security personnel to remain at a safe distance of 6 to 10 feet while conducting inspections and allows users the convenience of remaining in their vehicles while being inspected. Multiple eGo ID Cards can be read in sub-second response times.

The eGo ID Card is read by TransCore's eGo family of readers configurable to support the Intellitag® protocol, which is compliant with the ANS INCITS 256-2001 standard.

The eGo ID Card is available in white or printable format using existing credit card printers. Optional features include a magnetic stripe and holes for permanent mounting or use as a hanging ID card.

## eGo™ ID Card

**COMMUNICATIONS****Frequency Range**

902 to 928 MHz

**Read Range**

Typical 6 to 10 ft (1.8 to 3 m) with unlicensed readers, Federal Communications Commission (FCC) Part 15

**Write Range**

Minimum of 5.5 ft (1.67 m)

User-specified groups within a population of tags can be selected, read from, and/or written to using multi-tag access commands.

**Anti-collision Protocol**

Efficient, binary tree-type anti-collision algorithm

**SOFTWARE FEATURES****Memory**

EEPROM

Byte resolution memory addressing

Byte resolution memory lock

1024 bits total memory:

- Unique 64-bit tag ID locked at the factory
- 880 bits user memory formatted and locked as required by application. User memory includes 128 bits that are factory programmable.

**Data Rate**

Read 8 bytes of data from a tag in less than 12 ms

Write a single byte of data to a tag in less than 25 ms

**LIFE EXPECTANCY****Service Life**

Capable of unlimited reads and more than 100,000 write transactions

**PHYSICAL****Dimensions**

2.126 x 3.15 x 0.030 in (5.4 x 8 x 0.076 cm)

**ENVIRONMENTAL****Operating Temperature**

+32°F to +122°F (0°C to +50°C)

**Storage Temperature**

-4°F to +158°F (-20°C to +70°C)

**Humidity**

95% condensing

**Vibration Tolerance**

1.5 G<sub>rms</sub>, 5 to 1000 Hz, 3 axes

**Shock Tolerance**

5 G, 1/2 sine pulse, 10 ms duration, 3 axes

**STANDARDS**

Fully compliant with ANS INCITS 256-2001 Part 4.2, ANS MH10.8.4, ISO/IEC CD 1800 Part 6, and GTAG standards

**OPTIONS**

- Magnetic stripe
- Holes for permanent mounting or hanging
- Customer-specific tag programming



**For product information call:** 1.800.923.4824 or 972.733.6600 (outside the U.S.) Fax 972.733.6486

[www.transcore.com](http://www.transcore.com)

© 2003 TC IP, Ltd. All rights reserved. TRANSCORE is a registered trademark and EGO is a trademark of TC IP, Ltd., and are used under license. INTELLITAG is a registered trademark of Intermec Technologies Corporation, a UNOVA Company. All other trademarks listed are the property of their respective owners. Contents subject to change. Printed in the U.S.A.